SILVERCREST®

Portable Hard Drive

in a contemporary slim design

GB IE User manual and service information

DK Brugervejledning og serviceinformation

MoBox 500

Table of Contents

Table of Contents **1**
General Information **1**
System Requirements 2
Package contents 2
Information to the Conformity 2
Disposal of Old Devices 3
Technical Specifications **4**
Intended Use 4
Important Safety Instructions **5**
Repair and Maintenance 7
Getting Started **8**
Connecting via an USB Cable 9
Note on Installing Applications 10
Formatting and Partitioning 10
Disconnecting 11
Troubleshooting **12**
Details of Guarantee **13**

General Information

Thank you for choosing a Silvercrest product.

Before you use this device for the first time, please read the following notes in this manual and heed all warnings, even if you are familiar with handling electronic devices. Keep this manual safe for future reference. If you sell the device or pass it on, it is essential you hand over this manual also.

Your SILVERCREST MoBox is an external hard disk drive that lets you enlarge your computer's storage capacity for saving and managing documents, videos, music files, photographs, graphics, etc. You can also use your new hard disk as a backup device for saving important information. Regardless of whether you use your hard disk as a storage

extension or a backup solution, this manual contains all the necessary information and tips you need for its operation.

The Silvercrest MoBox features the following:

- 500 GB storage capacity
- Plug and Play
- High data transfer rate
- USB 2.0
- Hot-plug support

System Requirements

The minimum system requirements are:

- Computer with: Pentium or other compatible processor, or higher
- Microsoft® Windows® 7, Windows Vista®, Windows® XP, Windows® 2000
- 128 MB RAM or higher, according to the requirements of Windows®
- Available USB 2.0 port

Package contents

- External housing with installed hard disk
- USB cable
- Pouch
- User's Manual

Information to the Conformity

CE This device has been tested for compliance with the relevant requirements of the EMC Directive 2004/108/EC.

Disposal of Old Devices

The European Directive 2002/96/EC applies to this product. All electric and electronic devices must be disposed of separately from household waste at established bodies.

Avoid hazards to the environment and dangers to your personal health by disposing of the device and its packaging properly. For further information about proper disposal, contact your local government, disposal bodies or the shop where you bought the device.

According to waste regulations, we are responsible for collecting any packaging materials for our products whenever they do not carry the icon of a nationwide collection system (such as the German "Grüne Punkt") and for taking care of their recycling and/or disposal. For more information about product recycling, please contact our Service Hotline. We will inform you of public collection points or a collection company near you that will dispose of the packaging material for free.

Technical Specifications

Model	**Silvercrest MoBox 500**
Type	External hard disk for USB 2.0 connection
Housing	High-quality plastic housing
Dimensions (L x W x H)	133 x 80 x 14,5 mm
Weight	156 g
Storage capacity	500 GB storage capacity (unformatted), brand name hard disk, 5400 r.p.m., pre-formatted for Microsoft® Windows® 7, Microsoft® Windows Vista®, Windows® XP and Windows® 2000 (NTFS)
System Requirements	Microsoft® Windows® 7, Windows Vista®, Windows® XP, Windows® 2000, USB 2.0
Power consumption	approx. 500 mA
Warranty	36 months

Intended Use

The Silvercrest MoBox has been developed for data backup and data transfer from and to a PC or notebook with USB ports and for indoor use. Some digital audio/video devices (like digital satellite receivers) feature a USB port for storing recorded TV programmes. You may also use your Silvercrest MoBox for such purposes. However, any use other than that mentioned above does not correspond to the intended use. If used for non-intended purposes or if the housing is opened, the warranty is rendered void. The manufacturer is not liable for any damage or interference caused by unauthorized modifications. The Silvercrest MoBox in its default configuration has not been designed for medical, lifesaving, rescue or life-maintaining purposes. This product has not been designed for corporate or commercial applications. This includes games, communication and others.

Important Safety Instructions

This icon denotes important information for the safe operation of the product and for the user's safety.

This symbol denotes further information on the topic.

Before you use this device for the first time, please read the following notes in this manual and heed all warnings, even if you are familiar with handling electronic devices. Keep this manual safe for future reference. If you sell the device or pass it on, it is essential you hand over this manual also.

- Handle your hard disk with care. Please always follow these safety instructions in order to avoid any damage or voiding the warranty. Damage to the hard disk can result in loss of data.
- Position the device on a stable, even surface and do not place any (heavy) objects on the device.
- Place the Silvercrest MoBox in a safe position so it cannot fall over.
- The device is not for use in environments with a high temperature or humidity (e.g. bathrooms), and must be kept free of dust.
- This product has not been designed for corporate or commercial applications.
- Operating temperature and operating humidity: 5 °C to 35 °C, max. 85% RH
- The Silvercrest MoBox saves data on a magnetic surface. For this reason, keep your MoBox away from sources that generate magnetic and electromagnetic fields.

Always make sure that

- there is free circulation of air (do not place the device on shelves, on a thick carpet, on a bed, or anywhere that obstructs the ventilation slots, and leave at least 10cm clearance on all sides);
- no direct heat sources (e.g. heating) can affect the device;
- no direct sunlight or bright artificial light reaches the device;
- contact with spray, dripping water and corrosive liquids must be avoided and the device should never be operated near water, and it must especially never be immersed (do not place any objects filled with liquids such as vases or drinks near the device);
- the device is never placed in the immediate vicinity of magnetic fields (e.g. loudspeakers);
- no fire sources (e.g. burning candles) are placed on or near the device;
- no foreign bodies are introduced into the device;
- the device must not be subject to any great temperature changes as this may cause moisture through condensation;
- the device should not be subject to excessive shocks and vibrations.

If you are not using the device within the Federal Republic of Germany, you must observe the regulations and laws in the country of use.

Cable Handling Precautions

- Always hold cables by the plug and never pull on the cable itself. Never hold the power cord with wet hands as this may cause a short circuit or electric shock. Never place the device, heavy objects or furniture on the cable and make sure that the cord does not bend too much, especially at the plug and sockets. Never make knots in the cable and do not tie it together with other cords. All cables should be positioned so that nobody can trip over them or be obstructed by them.
- Install the cables in a safe way. Avoid tripping over them.

- Do not attempt to open the Silvercrest MoBox case, otherwise you will void your warranty.
- Do not remove any cables before properly shutting down the device in the operating system (see page 11 – Disconnecting).

Children and Persons with Disabilities

- Do not allow children or persons with disabilities to use electrical devices when not under supervision. These people may not comprehend the presence of potential risks.
- Keep the packaging away from children and persons with disabilities too as there is danger of suffocation.

Repair and Maintenance

Repairs are required when this device has been damaged in any way, for example, when liquid has entered the product, when the product has been exposed to rain or moisture, when the product does not work normally or if the product has been dropped. If smoke, unusual noises or smells are noticed, remove the device immediately from the USB port. In this case the device should not be used further and should be inspected by authorized service personnel. Please contact qualified personnel when servicing is needed. Never open the housing of the device, as it may be damaged. Only use a clean, dry cloth for cleaning.

Getting Started

Please read this user manual before using the device for the first time. This prevents incorrect operation and use. Unpack the Silvercrest MoBox and keep the packaging.

Front view

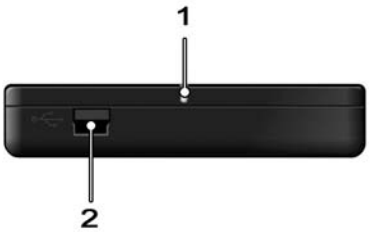

1 - LED indicator (blinks during data transfer)

2 - USB port

USB cable

3 - USB connector for Silvercrest MoBox

4 - USB connector for computer (Data/Power)

5 - Optional power supply (Power)

Connecting via an USB Cable

1. Insert the flat connector labelled “Data/Power” [4] of the USB cable into a free USB port on your desktop PC or notebook.
2. Next connect the other connector [3] of the USB cable to the USB port [2] of your Silvercrest MoBox.
3. The operating system will automatically detect that a new USB device has been connected and will install the corresponding driver.
4. Only if required, plug the second USB connector labelled “Power” [5] to another USB port. This will ensure that there will be enough power available for using the product without any problems.

On first-time connection of the Silvercrest MoBox, the operating system will notify of the detection of new hardware with this message:

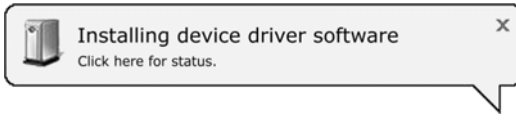

Figure: Installation message (message depending on operating system)

The built-in hard disk has already been formatted with the NTFS file system and is therefore ready for immediate use. The Silvercrest MoBox shows as a new disk in "My Computer" with a drive letter assigned by the operating system. The drive letter assigned depends on the number of disk drives you already have connected to your computer.

Figure: “My Computer” showing the Silvercrest MoBox

After this installation you can use the new Silvercrest MoBox hard disk in exactly the same way as any other hard disk on your computer. Silvercrest MoBox fields of application include:

- Moving or copying files or folders from other drives, CD-ROMs or other media
- Installing and opening all kinds of program files on the new hard disk
- Saving video clips, games and other data
- Making safety copies of important data from your PC (backup)

Note on Installing Applications

Your Silvercrest MoBox lets you install and execute applications just like any other disk drive. Please note, however, that most Windows-based applications that have been installed on the Silvercrest MoBox are only operational on the computer on which the applications were installed. On installation, additional software information is frequently copied to the partition of the operating system (usually C drive), necessary for the execution of the application. If you use the Silvercrest MoBox on another computer, this additional information will be missing. If you connect the Silvercrest MoBox once again to a computer to which the application had previously been installed, the application will function perfectly.

Formatting and Partitioning

The Silvercrest MoBox factory default settings are already formatted with the NTFS file system. It is therefore not necessary to format again if you do not wish to change the file system or the partitioning.

When using the MoBox for AV applications, it may be necessary to use the FAT32 file system.

If you format the Silvercrest MoBox, all data saved onto the hard disk will be deleted. Make backup copies of all data that you wish to use again after the formatting.

Partitioning can be comfortably carried out and processed in Disk Management under Windows operating systems. To do this, select the following (example for Windows® XP in standard view):

[Start] > [Control Panel] > [Performance and Maintenance] > [Administrative Tools] > [Computer Management] > [Disk Management]

Right-click on the Silvercrest MoBox icon and select "Format..." in the context menu to format the current partition or select "Delete partition..." to delete the current partition and to create one or more new partitions.

You can find more information on partitions in Help. Click on the question mark in the command list and write the search word "Partition" in "Help topics".

Disconnecting

The Silvercrest MoBox can be connected to, and removed from, the computer while the computer is powered on. However, if you remove the MoBox from the computer without disconnecting it properly from the operating system, file damage or loss of data may occur.

Click with the left mouse button on the "Safely Remove Hardware" icon in the task bar beside the system clock (see figure below).

Figure: Safely remove hardware example from Windows® XP

In the window that follows it is possible that more than one external device is displayed. Select the Silvercrest MoBox by left-licking on it. A message will soon appear, indicating that you can now safely remove the Silvercrest MoBox.

Troubleshooting

The computer does not detect the Silvercrest MoBox.

The connector labelled “Data/Power” must as a minimum be plugged into the computer. If the device fails to respond, you must plug the second USB connector into an available USB port of your computer too.

You may also try different USB ports.

Do not use any USB extension cords.

Installed applications do not execute on another computer.

When installing any applications on an external hard disk, this application will normally run on the computer where it had originally been installed.

The Silvercrest MoBox makes a noise.

A low noise level is normal during operation.

Some data has disappeared from the Silvercrest MoBox.

If you have copied data, it is necessary to safely remove the USB device from the operating system otherwise loss of data may occur.

The data transmission is very slow.

Make sure that you are using a USB port that supports standard 2.0. USB 1.1 ports offer a much slower data transfer.

Details of Guarantee

36 month warranty from date of purchase

UK

Important

SILVERCREST

Dear Customer,

Thank you for purchasing a Silvercrest product.

We ask you to read carefully through the enclosed documentation or online help before putting your Silvercrest product into service. If you have a problem, which can not be solved in this way, please contact our hotline.

In case that trouble solving over the telephone is not possible, our hotline will arrange the service depending on the fault of the device. This will contain the elimination of defects by production and material at no charge.

Up-to-date information and answers to the most frequently asked questions are available on the internet from: www.silvercrest.cc

This guarantee is valid in United Kingdom.

Your statutory guarantees from the seller are in addition to this warranty and are not limited by it.

BT

36 month warranty

Hotline number

0207 - 36 50 744

(Please have your serial number at hand!)

Manufacturer:

TARGA GmbH
Postfach 22 44
D-59482 Soest
www.silvercrest.cc

36 month warranty from date of purchase

Ireland

Important

SILVERCREST

Dear Customer,

Thank you for purchasing a Silvercrest product.

We ask you to read carefully through the enclosed documentation or online help before putting your Silvercrest product into service. If you have a problem, which can not be solved in this way, please contact our hotline.

In case that trouble solving over the telephone is not possible, our hotline will arrange the service depending on the fault of the device. This will contain the elimination of defects by production and material at no charge.

Up-to-date information and answers to the most frequently asked questions are available on the internet from: www.silvercrest.cc

This guarantee is valid in Ireland.

Your statutory guarantees from the seller are in addition to this warranty and are not limited by it.

BT

36 month warranty

Hotline number

01 - 242 15 83

(Please have your serial number at hand!)

Manufacturer:

TARGA GmbH
Postfach 22 44
D-59482 Soest
www.silvercrest.cc

Indholdsfortegnelse

Indholdsfortegnelse 15
Generelle oplysninger 15
Systemkrav 16
Pakkens indhold 16
Bemærkning til Konformitetserklæring 16
Bortskaffelse af gamle apparater 17
Tekniske specifikationer 18
Beregnet brug 18
Vigtige sikkerhedsanvisninger 19
Reparation og vedligeholdelse 21
Komme i gang 22
Tilslutning via et USB-kabel 23
Bemærkning til installering af applikationer 24
Formatering og partitionering 24
Frakobling 25
Fejlfinding 26
Garantidetaljer 27

Generelle oplysninger

Tak, fordi du har valgt et Silvercrest-produkt.

Før du tager denne lampe i brug første gang, bedes du læse nedenstående anvisninger og overholde alle advarsler, også selvom du i forvejen er fortrolig med at håndtere elektroniske apparater. Opbevar denne vejledning på et sikkert sted til fremtidig brug. Hvis du sælger eller videregiver denne pandelampe til andre, er det meget vigtigt, at denne vejledning vedlægges.

Silvercrest MoBox er en ekstern harddisk, som du kan bruge til at supplere din computers lagerkapacitet til at gemme og holde styr på dokumenter, videoer, musikfiler, fotos, grafik osv. Du kan også bruge denne harddisk til at sikkerhedskopiere vigtig information. Hvad enten du bruger

harddisken som en ekstra lagerenhed eller til sikkerhedskopiering, finder du alle de nødvendige oplysninger og tips, du har brug for til at betjene harddisken, i denne vejledning.

Silvercrest MoBox-harddisken har følgende:

- 500 GB lagerkapacitet
- Plug-and-play
- Høj dataoverførselshastighed
- USB 2.0
- Hot-swapping-teknologi

Systemkrav

Der er følgende minimumkrav til computeren:

- Computer med: Pentium eller anden kompatibel processor eller højere
- Microsoft® Windows® 7, Windows Vista®, Windows® XP, Windows® 2000
- 128 MB RAM eller derover, alt efter Windows®-kravene
- Ledig USB 2.0 port

Pakkens indhold

- Eksternt kabinet med indbygget harddisk
- USB-kabel
- Etui
- Brugervejledning

Bemærkning til Konformitetserklæring

CE Dette apparat er kontrolleret for overholdelse af de relevante krav samt i EMC-direktivet 2004/108/EC.

Bortskaffelse af gamle apparater

Dette apparat er omfattet af EU-direktiv 2002/96/EC. Alle elektriske og elektroniske enheder skal bortskaffes særskilt fra husholdningsaffald på dertil indrettede steder.

Skån miljøet og undgå farer for dit eget helbred ved at bortskaffe enheden og dens emballage på korrekt vis. Kontakt de lokale myndigheder, genbrugsstationer eller den forretning, hvor du købte enheden, for nærmere oplysninger om korrekt bortskaffelse.

Ifølge affaldsregulativerne har vi ansvaret for indsamling af indpakningsmaterialer for vores produkter, når de ikke har ikonet for det nationale indsamlingssystem (f.eks. det tyske "Grüne Punkt") og tage sig af genbrug og/eller bortskaffelse. For yderligere oplysninger om produktgenvinding bedes du kontakte vores Service Hotline. Vi vil oplyse om offentlige indsamlingspunkter eller et indsamlingsfirma i nærheden, som vil bortskaffe pakkematerialet gratis.

Tekniske specifikationer

Model	**Silvercrest MoBox 500**
Type	Ekstern harddisk til USB 2.0-tilslutning
Kabinet	Højkvalitets plastikkabinet
Mål (H x B x D)	133 x 80 x 14,5 mm
Vægt	156 g
Lagerkapacitet	500 GB lagerkapacitet (uformateret), varemærke-harddisk, 5400 o/min, formateret til Microsoft® Windows® 7, Microsoft® Windows Vista®, Windows® XP and Windows® 2000 (NTFS) ved leveringen
Systemkrav	Microsoft® Windows® 7, Windows Vista®, Windows® XP, Windows® 2000, USB 2.0
Strømforbrug	ca. 500 mA
Garanti	36 måneder

Beregnet brug

Silvercrest MoBox er beregnet til sikkerhedskopiering og overførsel af data fra og til en pc eller notebook med USB-porte samt til brug indendørs. Visse digitale audio/video-apparater (såsom digitale satellitmodtagere) har en USB-port til lagring af optagede tv-programmer. Du kan også bruge din Silvercrest MoBox til dette formål. Men enhver anden anvendelse, end den ovenfor nævnte, er i strid med den beregnede brug. Hvis DataBox anvendes til formål, som den ikke er beregnet til, eller hvis kabinettet åbnes, bortfalder garantidækningen. Producenten er ikke ansvarlig for eventuelle skader eller interferens forårsaget af uautoriserede modifikationer. Silvercrest MoBox er i standardkonfigurationen ikke beregnet til medicinsk, livreddende, rednings- eller livsbevarende brug. Dette produkt er ikke beregnet til virksomheds- eller erhvervsmæssige applikationer. Dette omfatter spil, kommunikations- og kontorprogrammer mv.

Vigtige sikkerhedsanvisninger

Dette ikon markerer vigtige oplysninger for sikker betjening af produktet og for brugerens sikkerhed.

Dette symbol betyder, at der er mere information om emnet.

Før du tager denne lampe i brug første gang, bedes du læse nedenstående anvisninger og overholde alle advarsler, også selvom du i forvejen er fortrolig med at håndtere elektroniske apparater. Opbevar denne vejledning på et sikkert sted til fremtidig brug. Hvis du sælger eller videregiver denne pandelampe til andre, er det meget vigtigt, at denne vejledning vedlægges.

- Håndter harddisken forsigtigt. Overhold altid disse sikkerhedsanvisninger for at undgå at beskadige harddisken eller at miste garantidækningen. Hvis harddisken bliver beskadiget, kan du miste data.
- Sæt apparatet på et stabilt, jævnt underlag, og læg ikke (tunge) genstande oven på det.
- Placer Silvercrest MoBox sikkert, så det ikke kan vælte.
- Apparatet er ikke beregnet til brug på steder, hvor temperaturen eller luftfugtigheden er høj (f.eks. i badeværelser), og det skal holdes frit for støv.
- Dette produkt er ikke beregnet til virksomheds- eller erhvervsmæssige applikationer.
- Driftstemperatur og luftfugtighed: 5-35° C, maks. 85% RH
- Silvercrest MoBox gemmer data på en magnetisk overflade. Af denne grund skal MoBox holdes på afstand af kilder, der genererer magnetiske og elektromagnetiske felter.

Sørg altid for, at

- at der er fri luftcirkulation (placer ikke apparatet i en reol, på et tykt tæppe, på en seng, eller hvor som helst der er hindringer for ventilationsåbningerne), og at der er mindst 10 cm afstand til alle sider
- der ikke er direkte varmekilder (f.eks. rumopvarmning), som kan påvirke apparatet,
- apparatet ikke bliver udsat for direkte sollys eller skarp kunstig belysning,
- undgå kontakt med vandsprøjt, -dråber og flydende nedbrydende midler, og brug aldrig apparatet i nærheden af vand, f.eks. må det aldrig nedsænkes i vand (placer ikke genstande med væske, f.eks. vaser eller drikkeglas, i nærheden af apparatet),
- at enheden aldrig placeres umiddelbart i nærheden af magnetfelter (f.eks. højttalere),
- at der ikke placeres brandkilder (f.eks. brændende stearinlys) på eller i nærheden af enheden,
- at der ikke indføres fremmedlegemer i enheden,
- apparatet ikke udsættes for store temperaturændringer, da dette kan give fugtdannelse på grund af kondens,
- apparatet ikke udsættes for kraftige stødpåvirkninger eller vibrationer.

Hvis dette apparat ikke anvendes i Tyskland, skal det anvendes i overensstemmelse med lovreglerne i det land, hvor det bruges.

Forholdsregler ved kabelhåndtering

- Hold altid ledningerne ved stikket, og træk aldrig i selve ledningen. Tag aldrig fat i ledningen med våde hænder, da der kan ske en kortslutning, eller du kan få elektrisk stød. Placer aldrig apparatet, tunge genstande eller møbler på ledningen, og pas på, at ledningen ikke kommer i klemme, især ved stikkene og stikkontakter. Lav aldrig knuder på ledningen og bind den aldrig sammen med andre ledninger. Placer alle ledninger, så ingen kan snuble over dem, og så de ikke er i vejen for nogen.

- Installer kablerne på sikker vis. Pas på ikke at falde over dem.
- Forsøg ikke at åbne Silvercrest MoBox-kabinettet, da det gør garantien ugyldig.
- Tag ikke ledningerne ud, før du har lukket harddisken korrekt på computeren (se side 25 - Frakobling).

Børn og handicappede personer

- Lad ikke børn eller handicappede personer bruge elektriske apparater uden opsyn. Børn og handicappede personer forstår ikke nødvendigvis mulige farer.
- Lad ikke børn eller handicappede personer komme i nærheden af emballagen, da den kan forårsage kvælning.

Reparation og vedligeholdelse

Enheden skal repareres, når den på en eller anden måde er ødelagt, f.eks. hvis der er kommet væske ind i den, når den har været udsat for regn eller fugt, når den ikke fungerer normalt, eller hvis den er tabt på gulvet. Hvis der bemærkes røg, unormale lyde eller lugte, skal apparatet straks tages ud af USB-porten. Hvis det sker, bør apparatet ikke bruges længere, og det bør efterses af et autoriseret serviceværksted. Kontakt et serviceværksted, hvis der er behov for service af enheden. Åbn aldrig kabinettet på apparatet, da apparatet kan blive beskadiget. Brug kun en ren, tør klud til rengøring.

Komme i gang

Læs brugervejledningen, før du tager apparatet i brug første gang. Så undgår du at betjene og bruge apparatet forkert. Tag Silvercrest MoBox ud af emballagen, og gem emballagen til evt. senere brug.

Set forfra

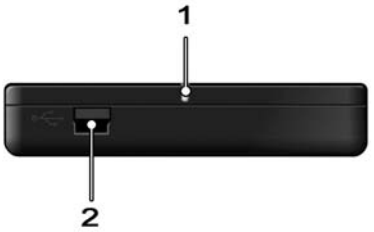

1 – LED-lampe (blinker under dataoverførsel)

2 – USB-port

USB-kabel

3 – USB-stik til Silvercrest MoBox

4 – USB-stik til computer (Data/Power)

5 – Ekstra strømforsyning (Power)

Tilslutning via et USB-kabel

1. Sæt det flade stik mærket ”Data/Power” [4] på USB-kablet i en ledig USB-port på din pc eller notebook.
2. Tilslut dernæst det andet stik [3] på USB-kablet til USB-porten [2] på Silvercrest MoBox.
3. Operativsystemet registrerer automatisk, at der er tilsluttet en ny USB-enhed, og installerer den tilhørende driver.
4. Om nødvendigt sættes det andet USB-stik mærket "Power" [5] i en anden USB-port. Sådan sikrer du, at der er tilstrækkeligt med strøm til, at produktet kan bruges uden problemer.

Ved tilslutning af Silvercrest MoBox første gang, vil operativsystemet give besked om, at der er fundet ny hardware, med følgende besked:



Figur: Installationsmeddelelse (meddelelse afhænger af operativsystemet)

Den indbyggede harddisk er allerede formateret med NTFS-filsystemet, og den er derfor klar til brug med det samme. Silvercrest MoBox vises som en ny disk "Denne computer" med en drevbetegnelse, der tildeles af operativsystemet. Den tildelte drevbetegnelse afhænger af, hvor mange diskdrev der i forvejen er tilsluttet computeren.

Figur: ”Denne computer”, der viser Silvercrest MoBox

Efter denne installation, kan du bruge den nye MoBox harddisk akkurat som alle øvrige harddiske på din computer. Silvercrest MoBox anvendelsesområder omfatter:

- Til at flytte eller kopiere filer eller mapper fra andre drev, cd-rom'er eller andre medier
- Til at installere og åbne alle programfiltyper på harddisken
- Til at gemme videoklip, spil og andre data
- Til at tage sikkerhedskopier af vigtige data fra din pc (sikkerhedskopiering)

Bemærkning til installering af applikationer

Du kan bruge Silvercrest MoBox til at installere og køre programmer akkurat som med alle øvrige diskdrev. Bemærk dog, at de fleste Windows-baserede applikationer, som er installeret på Silvercrest MoBox, kun kan køre på den computer, som applikationerne er installeret på. Ved installationen kopieres yderligere softwareoplysninger typisk til partitionen på operativsystemet (normalt C-drevet), som er nødvendige til at køre applikationen. Hvis du bruger Silvercrest MoBox på en anden computer, mangler disse yderligere oplysninger. Hvis du igen tilslutter Silvercrest MoBox til den computer, hvor applikationen tidligere er installeret, fungerer applikationen perfekt.

Formatering og partitionering

Silvercrest MoBox fabriksindstillingerne er allerede formateret med NTFS-filsystemet. Det er derfor ikke nødvendigt at formatere den igen, hvis du ikke ønsker at ændre filsystem eller partitionering.

Når du bruger MoBox til AV-formål, kan det være nødvendigt at bruge FAT32-filsystemet.

Hvis du formaterer Silvercrest MoBox, vil alle data gemt på harddisken blive slettet. Tag sikkerhedskopier af alle data, som du ønsker at bruge igen efter formateringen.

Partitioneringen kan nemt udføres og behandles i Filhåndtering i Windows-operativsystemerne. Det gøres ved at vælge følgende (eksempel fra Windows® XP i standardvisning):

[Start] > [Kontrolpanel] > [Ydelse og Vedligeholdelse] > [Administration] > [Computeradministration] > [Diskhåndtering]

Højreklik på ikonet for Silvercrest MoBox og vælg "Formatér…" i kontekstmenuen for at formatere den aktuelle partition eller vælg "Slet partition…" for at slette den aktuelle partition og oprette én eller flere nye partitioner.

Du kan finde flere oplysninger om partitioner under Hjælp. Klik på spørgsmålstegnet i funktionsmenuen og skriv søgeordet "Partition" under "Emner i Hjælp".

Frakobling

Silvercrest MoBox kan tilsluttes og fjernes fra computeren, mens computeren er tændt. Men hvis du fjerner MoBox fra computeren uden at lukke den korrekt ned i operativsystemet, kan du risikere at beskadige dine filer eller at miste data.

Venstreklik på ikonet "Sikker fjernelse af hardware" på opgavelinjen ved siden af systemuret (se figuren nedenfor).

Figur: Sikker fjernelse af hardware-eksempel fra Windows® XP

I det vindue, der vises, er det muligt, at der vises mere end én ekstern enhed. Vælg Silvercrest MoBox ved at venstreklikke på den. Kort efter vises en meddelelse om, at Silvercrest MoBox nu kan fjernes sikkert.

Fejlfinding

Computeren kan ikke finde Silvercrest MoBox.

Du skal mindst tilslutte stikket mærket ”Data/Power” til computeren. Hvis enheden ikke reagerer, skal du også tilslutte det andet USB-stik til en ledig USB-port på din computer.

Du kan også prøve en anden USB-port.

Brug ikke USB-forlængerledninger.

Installerede applikationer køres ikke på en anden computer.

Når man installerer applikationer på en ekstern harddisk, vil de normalt køre på den computer, hvor de oprindeligt blev installeret.

Silvercrest MoBox laver lyde.

Det er normalt med en svag lydafgivelse under brug.

Der er forsvundet data fra Silvercrest MoBox.

Hvis du har kopieret data, skal du fjerne USB-enheden sikkert fra operativsystemet. Ellers kan det medføre mistede data.

Dataoverførslen er meget langsom.

Sørg for, at du bruger en USB-port, der understøtter standard 2.0. USB 1.1-porte har en meget langsommere dataoverførselshastighed.

Garantidetaljer

36 måneders garanti fra købsdatoen

Denmark

Vigtige garantioplysninger

SILVERCREST

Kære kunde.

Mange tak fordi du har købt et Silvercrest-produkt.

Før du tager dit Silvercrest-produkt i brug, skal du læse den vedlagte dokumentation og/eller online-hjælpen grundigt. Skulle du støde på problemer, som ikke kan løses ved at læse dokumentationen, skal du kontakte vores Hotline.

Hvis en telefonisk løsning ikke er mulig, vil vores hotline udløse den nødvendige service, dette omfatter gratis udbedring af produktions- og materialefejl.

For at se de seneste oplysninger og oftest stillede spørgsmål skal du besøge: www.silvercrest.cc

Denne garanti er gældende i Danmark.

Dine almindelige garantirettigheder over for forhandleren gælder ud over denne garanti og begrænses hermed ikke af den.

BT

36 month warranty

Telefonnummer til Hotline

38 - 322 953

(Sørg for at have dit serienummer klar!)

Producent:

TARGA GmbH
Postfach 22 44
D-59482 Soest
www.silvercrest.cc

CE

EC Declaration of Conformity

We: Targa GmbH
Lange Wende 41
59494 Soest, Germany

declare our responsibility that the

product: External USB Harddisk

model: SilverCrest MoBox 500

is confirmed to comply with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility 2004/108/EC.

The measurements were carried out in accredited laboratories.

For the evaluation of above mentioned Council Directives for Electromagnetic Compatibility were consulted:

EMC: EN 55024: 1998 + A1: 2001 + A2: 2003
EN 55022: 2006 (limit class B)

Soest, 10th of March 2010
authorised signature

Matthias Klauke, Managing Director

CE

TARGA GmbH
Lange Wende 41
D-59494 Soest
www.silvercrest.cc

GB
IE
DK

Mat-No: 1578986